

Puket

Espositore verticale a temperatura positiva per l'esposizione e vendita di latticini, salumi, ortofrutta, carni e polli.

GB

Chiller multideck counter for dairy products and sausages, fruit and vegetable, meat and poultry.

F

Vitrine verticale à température positive pour produits laitiers, charcuterie, fruits et légumes, viandes et volailles.

D

Wandkühlregal für Molkereiprodukte, Wurstwaren, Obst u. Gemüse, Fleisch u. Geflügel.

E

Heladera vertical a temperatura positiva para productos lácteos, embutidos, fruta, verdura, carnes y aves.

RUS

Холодильная горка, подходящая для экспозиции мяса, молока и овощей и фруктов.

Puket

DATI TECNICI

Puket


H

M2


M1

Angolo Aperto

Puket P950 AA45°




Puket P950 AA90°




Angolo Chiuso

Puket P950 AC45°




Puket P950 AC90°




Testate


Puket P950 + P950




Puket P1130 AA45°




Puket P1130 AA90°




Puket P1130 AC45°




Puket P1130 AC90°




Puket P1130 + P1130




Puket 950 H2040 - P950 - HF 300/ HF 440/ HF 540

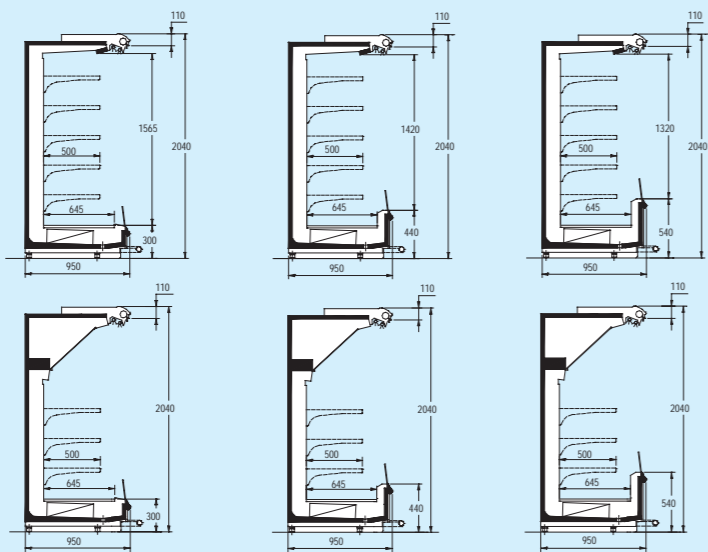


Puket 950 H2250 - P950 - HF 300/ HF 440/ HF 540

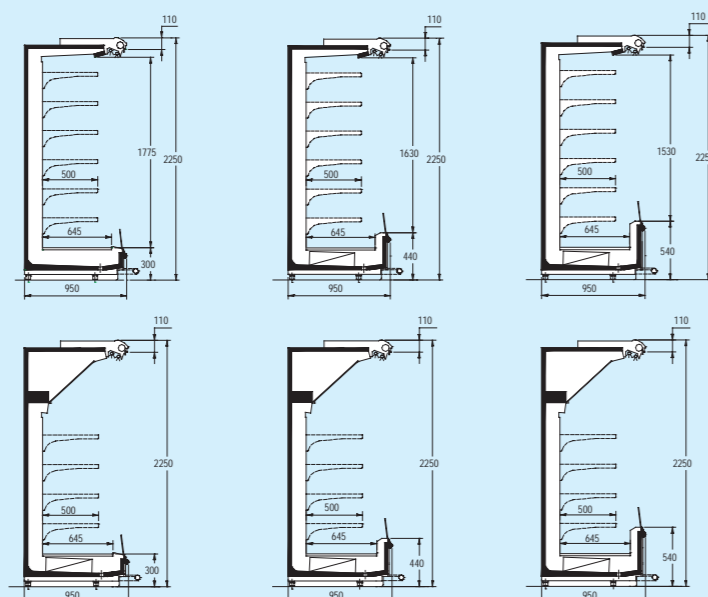


Puket 1130 H2040 - P1130 - HF 300/ HF 440/ HF 540

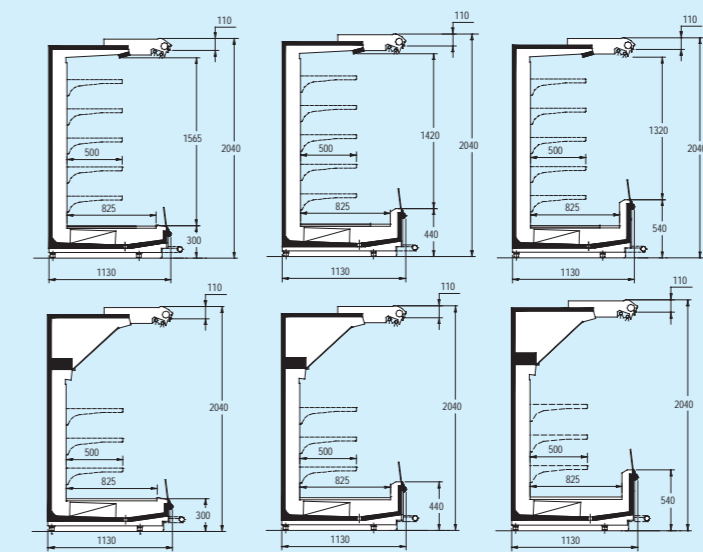


Puket 1130 H2250 - P1130 - HF 300/ HF 440/ HF 540

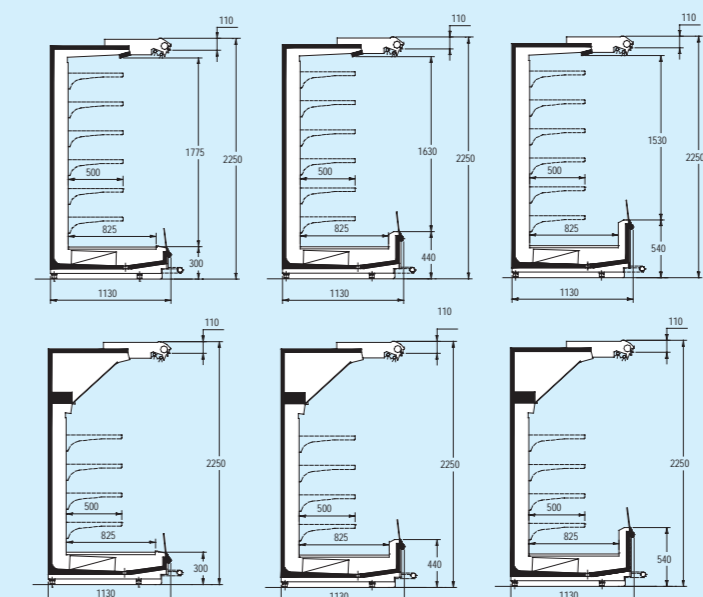

Puket 1130 L H2040 - P1130 - HF 300/ HF 440/ HF 540

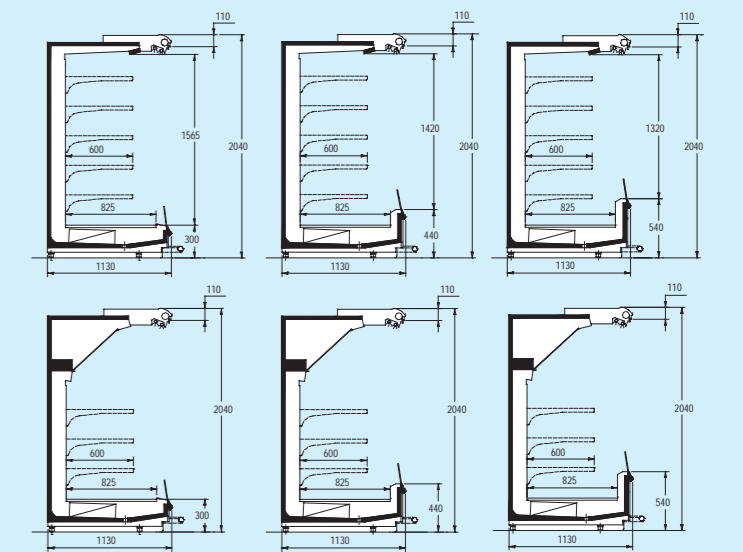

Puket 1130 L H2250 - P1130 - HF 300/ HF 440/ HF 540

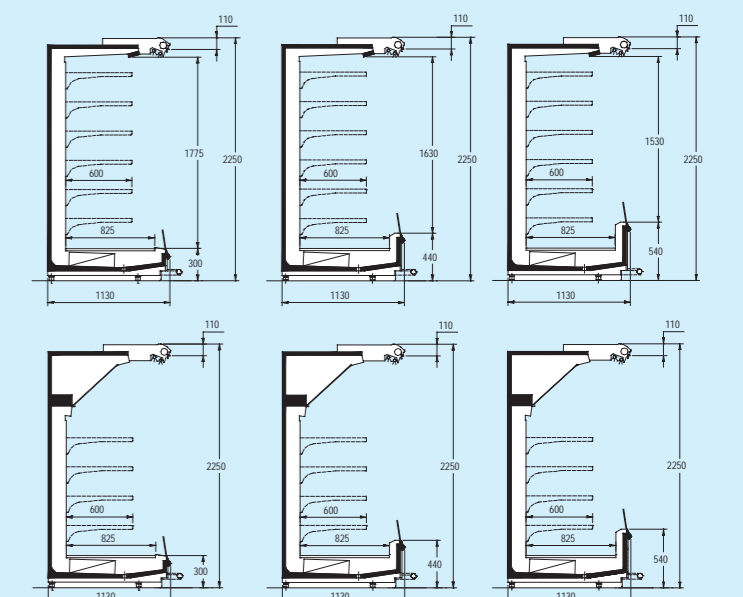


	H	M2	M1
Lunghezza length/ longueur/ länge/ longitud	mm 1875 2500 3750	1875 2500 3750	1875 2500 3750
Spessore spalla thickness of end/ épaisseur joue/ seitenteil dicke/ espesor del lateral	mm 35 max 50	35 max 50	35 max 50
P 950 HF 300 Superficie espositiva display area/ surface d'exposition/ Ausstellungsfläche/ superficie espositiva	H2040 m ²	3,24 4,33 6,49	3,24 4,33 6,49
	H2250 m ²	3,64 4,85 7,28	3,64 4,85 7,28
P 950 Volume lordo gross loading capacity/ capacité de chargement brut/ Inhalt/ capacidad de carga bruta	H2040 m ³	1,41 1,88 2,82	1,54 2,05 3,08
	H2250 m ³	1,61 2,14 3,21	1,74 2,82 3,47
P 1130 Volume lordo gross loading capacity/ capacité de chargement brut/ Inhalt/ capacidad de carga bruta	H2040 m ³	1,48 1,97 2,95	1,61 2,14 3,22
	H2250 m ³	1,67 2,23 3,35	1,81 2,41 3,61
Potenza elettrica nominale rating power/ puissance absorbée/ Leistungsaufnahme/ potencia absorbida	H2040 W	257 279 419	257 279 419
	H2250 W	286 310 466	286 310 466
Potenza elettrica assorbita in sbrinamento defrosting power/ puissance pour le dégivrage/ Abtaungsleistungsaufnahme/ potencia descongelación	H2040 W	257 279 419	932 1159 1782
	H2250 W	286 310 466	1036 1288 1981
Temperatura d'esercizio running temperature/ température de fonctionnement/ betriebstemperatur/ temperatura de ejercicio	°C	+6°/ +8°	+3°/ +5°

L'azienda si riserva di apportare modifiche tecniche senza preavviso. - The Company reserves the right to modify these models without advise. - La société se réserve le droit d'apporter modifications techniques sans préavis. - Der Hersteller behält sich mögliche Änderungen ohne vorherige Mitteilung vor. - La sociedad se reserva el derecho de introducir modificaciones sin previo aviso.

* Specchio applicato solo per utilizzo 3H1.
Per utilizzo M1 uscita aria sotto lo specchio.



Campionario colori / colour sample / farbenmuster / échantillon couleurs / lista colores

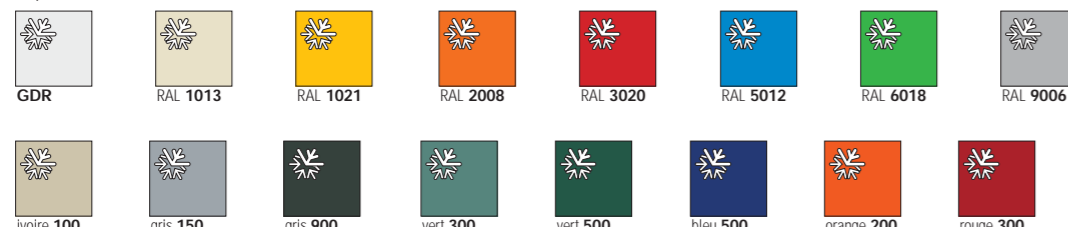

Upon request
akzo nobel - sable

DE RIGO REFRIGERATION srl

Sede Legale Amministrativa e Stabilimenti Via Cavassico Inferiore, 1 - 32028 Trichiana BL - Italy
Tel. +39 0437 5591 Fax +39 0437 559300 - info@derigorefrigeration.com - expsales@derigorefrigeration.com
Stabilimento di Ronchi dei Legionari Via Redipuglia, 163 - 34077 Ronchi dei Legionari GO - Italy
Tel. +39 0481 477411 Fax +39 0481 776330 - vendite@derigorefrigeration.com
Stabilimento di Pomezia Via Naro, 71 - 00040 Pomezia - Roma - Italy
Tel. +39 06 9106611 Fax +39 06 9120296 - roma@derigorefrigeration.com
www.derigorefrigeration.com

DE RIGO
SURFRIGO

Puket

